

'Intelligent' automatic applicator for applying relatively small labels to products travelling along an existing production line. Principally used for 'promotion' labelling.

## TECHNICAL SPECIFICATION

### Applicator Features

- Stepper motor drive
- Label roll unwind unit for reels up to 300mm o/d - 450 linear metres
- Label width up to 100mm
- Height adjustable floor stand with anti-slide feet and casters
- Chrome plated cross bracket with handwheels for horizontal and vertical adjustment
- Aluminium full spool discs
- Side or top mounted
- Left or right hand versions available
- 110V or 240V single phase available

### Control Box Features


- Microprocessor control with LED display
- Variable dispensing speed control
- Missing label on reel compensator
- Label flag (pre-dispense) control
- Label dwell time control
- Labels dispensed counter (incremental or decremental)
- Label web break signal

### Options

- Warning beacon for low label alarm
- Stainless steel stand
- Powered belt conveyor 1.5m x 300mm
- Multi-disc roller (for application of labels to uneven surfaces)
- Clear label sensor
- Vacuum transfer tamp/blow assembly



Standard machine: dispensing speed up to 30 m/min

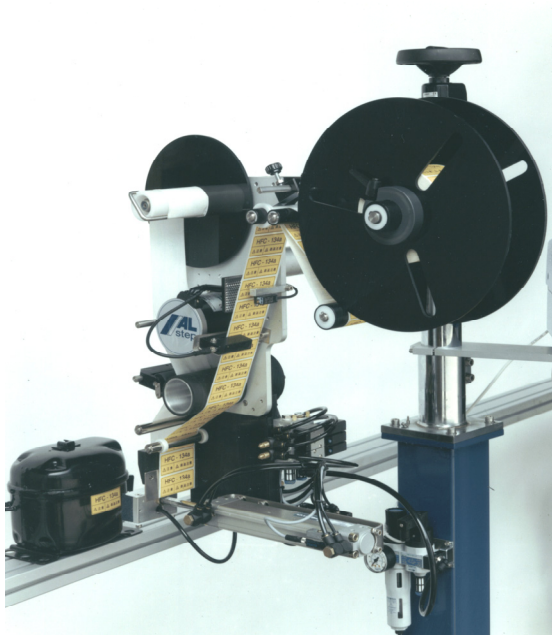

Standard machine with vacuum transfer assembly